

PCT

 WORKING PCT  
 INTELLECTUAL PROPERTY ORGANIZATION  
 International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

 51) International Patent Classification 6:  
 F16K 47/04, F22G 5/12 // F16K 3/26

A1

(11) International Publication Number:

WO 97/03313

(43) International Publication Date:

30 January 1997 (30.01.97)

(21) International Application Number:

PCT/SE96/00922

(22) International Filing Date:

5 July 1996 (05.07.96)

(30) Priority Data:

9502455-7

10 July 1995 (10.07.95)

SE

(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SI).

Published

 With international search report.  
 In English translation (filed in Swedish).

(73) Applicant (for all designated States except US): BTG KÄLLE INVENTING AB [SE/SE]; P.O. Box 602, S-661 29 Saffle (SE).

(72) Inventor; and


(75) Inventor/Applicant (for US only): ALBRECHT, Franz [AT/AT]; Apostelgasse 15/11, A-1030 Wien (AT).

(74) Agents: BJELKSTAM, Peter et al.; Kransell &amp; Wennborg AB, P.O. Box 27834, S-115 93 Stockholm (SE).

(54) Title: DEVICE AND METHOD RELATING TO A PRESSURE-REGULATING VALVE

(57) Abstract

The invention relates to a method and a device for a valve for pressure regulation of steam, said valve including a steam plug (2) with bores (4) in its skirt (3), said bores being successively exposed as the valve is opened for achieving the regulated passage of the steam through the valve (1), and a water injection arrangement (5) situated downstream the steam plug (2) for temperature control of the steam. The water injection arrangement (5) is provided with at least one atomizing nozzle (7) for use from small openings of the valve (1), said nozzle (7) being connected to at least one feed means (9) for feeding auxiliary steam from the high pressure side (13) of the valve (1) in order to vaporize the water, said means (9) having its inlet in the area of the sealing surface (8) of the valve is closed. According to the inventive method, auxiliary steam is taken from the high pressure side (13) of the valve, said steam vaporizing the water used for temperature control of the steam amount regulated by means of the valve.

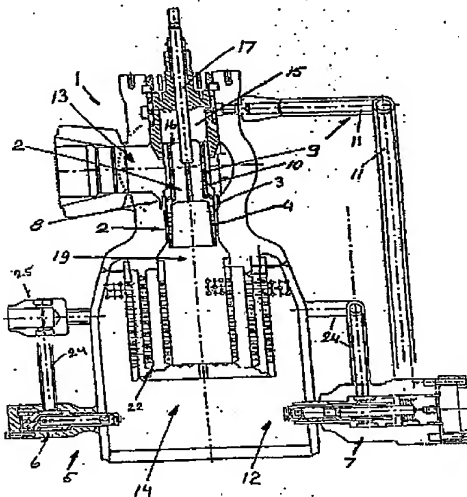

NSD0010: &lt;WO\_9703313A1.L&gt;

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Gambia	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Cote d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

ISSOCID: <WO\_970331AA1J>

WO 97/03313

1

Device and method relating to a pressure-regulating valve

5 The present invention relates to a device and a method for a valve intended for pressure and temperature regulation of steam, said device comprising a plug with a skirt provided with drilled holes, such that, as the plug is caused to rise, the holes are successively exposed for the regulated passage of the steam through the valve, and a water-injection arrangement situated downstream of the plug for temperature control of the steam.

15 Valves of the above-mentioned type commonly used on the market regulate steam pressure by the plug being lifted, thereby exposing drilled holes in its skirt simultaneously as the valve controls the temperature of the steam by water being injected downstream of the plug with the aid of a separate system. This standard solution functions at a low steam velocity in the valve outlet down to about 8 m/s but this has been found to be a great limitation, since in some cases plants have to work with small steam amounts giving low velocities.

25 The purpose of the present invention is to provide a device and a method for a valve of the kind mentioned above, the drawbacks existing with the above-mentioned, previously known arrangements being eliminated. According to the invention, both pressure regulation and temperature control of the steam can be provided at low steam velocities. The characterizing features of the invention are stated in the accompanying claims.

35 Thanks to the invention, a device and a method for a valve of the above-mentioned type has been provided, which fulfil their purposes in an excellent manner, while the device is cheap to manufacture. By means of

the device and the method according to the invention a  
solution has been proposed, where the water can be  
vaporized with the aid of auxiliary steam taken from  
the high pressure side of the valve. From here the  
5 auxiliary steam is regulated by means of the steam plug  
in the area of its sealing surface, whereby the plug  
during its opening phase exposes feed means for the  
auxiliary steam for feeding it to at least one special  
atomizing nozzle, which is provided downstream of the  
10 plug and in which vaporization of the water takes place  
for temperature control of the low-velocity regulated  
steam. According to the invention, auxiliary steam can  
also be fed from the area of the sealing surface of the  
steam plug upwards through channels in the plug and  
15 further through a piping system to the atomizing nozzle  
or nozzles. When the valve is closed, the plug func-  
tions as a sealing means for this arrangement, since  
its sealing surface is then enveloped by its seal, thus  
closing off the distribution channels for the auxiliary  
20 steam, and when the plant is used the plug is lifted by  
means of an actuator for exposing the channels distri-  
buting the auxiliary steam, which can then pass to the  
place for injection via the atomizing nozzles on the  
outlet side of the valve. In accordance with the inven-  
25 tion, this arrangement eliminates a separate, outer  
shut-off valve, which has otherwise been necessary.

The invention will now be described below in more  
detail with the aid of some embodiments and with refer-  
30 ence to the enclosed drawings, on which

Fig. 1 shows a schematic, cross-sectional view through  
a first embodiment of a pressure-regulating valve in  
accordance with the present invention, this valve  
35 including a partly "balanced" steam plug,

Fig. 2 shows, like Fig. 1, a schematic, cross-sectional view of a second embodiment of the valve in accordance with the invention, said valve including an entirely "balanced" steam plug,

Fig. 3 shows, like Figs. 1 and 2, a schematic, cross-sectional view through a third embodiment of the valve in accordance with the invention, said valve comprising an entirely "tight" steam plug,

Fig. 4 shows a schematic side view of the device illustrated in Fig. 1 in an enlarged, partial view, and from which it will be seen how the sealing of the atomizing steam by means of the steam plug takes place,

Fig. 5 shows an enlarged, partial side view of the valve illustrated in Fig. 1 and more precisely how the atomizing steam is distributed through the steam plug and further towards the conduit feeding the steam to the atomizing nozzles, and

Fig. 6 shows an enlarged side view in section of an atomizing nozzle, in which temperature-controlling water is vaporized by means of the auxiliary steam.

As appears in more detail from Fig. 1 and from partial enlargements thereof according to Figs. 4, 5 and 6, all these views illustrate a first, preferred embodiment of the invention, which consists of a valve 1 for the pressure regulation of steam and includes a steam plug 2 with a skirt 3 provided with bores 4, which are successively exposed as the valve is opened for regulating the passage of steam through the valve 1. The valve 1 also includes a water injection arrangement 5, situated downstream of the steam plug 2 for regulating steam temperature. As appears from Fig. 1, the water injection arrangement 5 comprises both ordinary nozzles

WO 97/03313

4

6 for injecting water for temperature control and at least one atomizing nozzle 7 for vaporizing this water by means of auxiliary steam, said nozzles 6, 7 being fed with water via conduits 24 and at least one connecting means 25. For small openings of the valve 1, i.e. when the regulated steam has low velocity and small steam quantity and when the velocity of steam at the outlet usually may be below about 8 m/s, the mentioned auxiliary steam is fed from the high pressure side 13 of valve 1 from the sealing surface 8 of the plug 2, such that this steam can be shut off by means of the plug 2 when the valve 1 is closed. The valve is provided with at least one means 9 for feeding auxiliary steam through the steam plug to the atomizing nozzle 7. The feed means 9 thus includes an inlet 21 opening out in the sealing surface 8 of the plug 2, and the inlet being shut off when the plug is in its position corresponding to the "valve closed" state. In the atomizing nozzle 7 the water used in this case for cooling the steam is disintegrated by the auxiliary steam, very effective cooling of the regulated steam being achieved. With previously known arrangements, where this type of atomizing nozzle is not used, but only ordinary nozzles 6, erosion is caused in the system at low, regulated steam velocities by the cooling water not being disintegrated by the regulated steam, which is normally the case at high steam velocities but immerses at the outlet of the valve as water droplets, which fall against the wall of the outlet conduit and can then not be vaporized.

According to a first embodiment of the invention illustrated in Fig. 1 the feed means 9 for the auxiliary steam includes at least two distribution ducts 10 extending from outlets 21 up through the plug 2 close to its circumference, said ducts 10 being, via a chamber 15 above the plug, in communication with conduits

WO 97/03313

PLT/SE96/00921

5

11 connected to the atomizing nozzle 7 at the injection  
place 12 on the outlet side 14 of the valve 1, on which  
side a silencer 22 is also arranged. As will appear in  
more detail from Fig. 4, for a closed valve state the  
5 sealing surface 8 of the steam plug 2 contains the  
mouth of the inlet 21 for the auxiliary steam conducted  
by the feed means 9. By this arrangement a "partly  
balanced" steam plug is obtained. When the valve is put  
into operation the plug 2 is lifted by an actuator 17,  
10 and the steam inlets 21 are exposed, thus enabling the  
steam to pass via the ducts 10 towards the injection  
place 12 at the outlet side 14 of the valve. According  
to this arrangement pressure is built up in the en-  
closed volume forming the transport path of the auxilli-  
15 ary steam. This means that a larger operating force is  
required for setting the valve than according to an  
arrangement, where the plug 2 is balanced.

An entirely "balanced" steam plug 2 will be seen from  
20 the embodiment illustrated in Fig. 2. Here, sealing off  
the auxiliary steam takes place in the same manner as  
with the arrangement illustrated in Fig. 1 and describ-  
ed above. However, distribution of the auxiliary steam  
takes place in a different way, so that the enclosed  
25 volume above the upper side 16 of the plug 2 can be  
balanced out by means of ducts 18 passing straight  
through the plug 2. This means that a smaller operating  
force is required than with the embodiment first de-  
scribed. Distribution of the auxiliary steam according  
30 to this embodiment takes place with the aid of a chan-  
nel 20 provided centrally through the plug and its  
actuator spindle, and opening out above the chamber via  
an upper part 23 of the actuator 17. The chamber 15 is  
in constant communication with the downstream side 19  
35 of the plug 2 by means of at least one elongated open-  
ing constituting said centrally situated channel 20.

WO 97/03313

6

PCT/SE96/00922

5 The embodiment illustrated in Fig. 3 relates to an entirely "tight" steam plug 2, although sealing and distribution of the auxiliary steam take place in exactly the same manner as described above in connection with the embodiment illustrated in Fig. 2. The enclosed volume above the upper side 16 of the plug 2 is, however, not connected to any outlet to the downstream side 19, i.e. there can be no steam leakage to the downstream side.

10 In Fig. 6 there is shown an enlarged, cross-sectional view of an atomizing nozzle 7 used with the valve according to the invention. By using this atomizing nozzle there is obtained effective temperature control  
15 of the steam regulated by the valve 1, even for small steam velocities and small steam quantities. Just outside this nozzle the water used for steam temperature control is disintegrated by the auxiliary steam fed to the nozzle from the high pressure side of the valve. In the Figure arrows are used to show the paths  
20 of temperature-controlling water and auxiliary steam through the valve.

25 According to the inventive method, at pressure regulation and simultaneous temperature control of the steam through the valve, when it operates with small steam quantities and velocities, there is obtained very effective temperature control of the regulated steam. This is enabled since, for small openings of the valve,  
30 where the velocity of the regulated steam at the outlet of the valve is below about 8 m/s, the auxiliary steam is taken from the high pressure side of the valve and used for vaporization of the temperature-controlling water, the supply of auxiliary steam being regulated  
35 with the aid of the plug 2, such that feed means 9 in the area of the plug sealing surface 8 are exposed during the opening phase of the valve. The means 9 thus



WO 97/03313

PLI/SE96/00922

7

5

allows the auxiliary steam to pass when the plug moves from its sealed position so that steam can be fed to at least one atomizing nozzle 7, for vaporization of the temperature-controlling water, thus to obtain very effective cooling of the regulated steam.

WO 97/03313

8

PCT/SE96/00922

Claims

1. A device for a valve intended for pressure regulation of steam and including a steam plug (2) with bores (4), which are successively exposed as the plug is lifted, such as to permit the regulated passage of steam through the valve (1), and a water injection arrangement (5) situated downstream of the plug (2) for temperature control of the steam, characterized in that the water injection arrangement (5) is provided with at least one atomizing nozzle (7) for use with small openings of the valve (1), said nozzle (7) being connected to at least one feed means (9) for auxiliary steam from the high pressure side (13) of the valve (1) in order to vaporize the temperature-controlling water, said feed means (9) having its inlet in the area of the sealing surface (8) of the plug and can be shut off by means of the steam plug (2) when the valve is closed.
2. Device according to claim 1, characterized in that the sealing surface (8) of the steam plug (2) contains the inlet of the feed means (9) for the auxiliary steam.
3. Device according to claim 1 or 2, characterized in that the feed means (9) for the auxiliary steam comprises distribution ducts (10) extending through the plug (2), said ducts being in communication with conduits (11) connected to the atomizing nozzle (7) at the injection place (12) on the outlet side (14) of the valve (1).
4. Device according to any one of the preceding claims, characterized in that at least two atomizing valves (7) are arranged at the outlet side (14) of the valve (1).

WO 97/03313

PCI/SE96/00922

9

5. Device according to any one of the preceding claims, characterized in that the distribution of auxiliary steam takes place through at least two ducts (10), extending through the steam plug (2) and being arranged just inside the envelope surface of the plug (2) for communication with the conduits (11), via a chamber (15) above the upper side (16) of the plug, leading to the atomizing nozzle (7), whereby the plug (2) is partly balanced.

6. Device according to any one of the preceding claims, characterized in that the distribution of the auxiliary steam takes place through a channel (20) centrally arranged through the plug and its actuator (17), said channel communicating with the conduits (11) leading to the atomizing nozzle (7) above the space (15) on the upper side (16) of the plug (2) via an upper part of the actuator (17) and said space above the plug (2) being in constant connection with the downstream side (19) of the plug (2) by means of at least one through opening (18), whereby the steam plug (2) is entirely balanced.

7. Device according to claim 6, characterized in that the space above the plug (2) does not have any connection to the downstream side (19) of the plug (2), whereby the steam plug (2) enables a tight valve.


8. Method for pressure regulation of steam in a valve and simultaneous temperature regulation of said steam, when the valve operates with small steam amounts and small steam velocities, said valve (1) comprising a steam plug (2) with bores (4), which are successively exposed as the valve is opened in order to regulate the steam, said temperature control taking place by water being injected downstream of the steam plug, characterized in that auxiliary steam is used for vaporiza-

WO 97/03313

PCT/SE96/00922

10


tion of the temperature-controlling water, downstream  
of the plug, said auxiliary steam being taken from the  
high pressure side (13) of the valve (1) and regulated  
with the aid of the steam plug (2) in the area of its  
5 sealing surface (8), where the plug (2) during its  
opening phase exposes at least one feed means (9) for  
the auxiliary steam, such as to enable feeding this  
steam to at least one atomizing nozzle (7), for the  
vaporization of the temperature-controlling water.

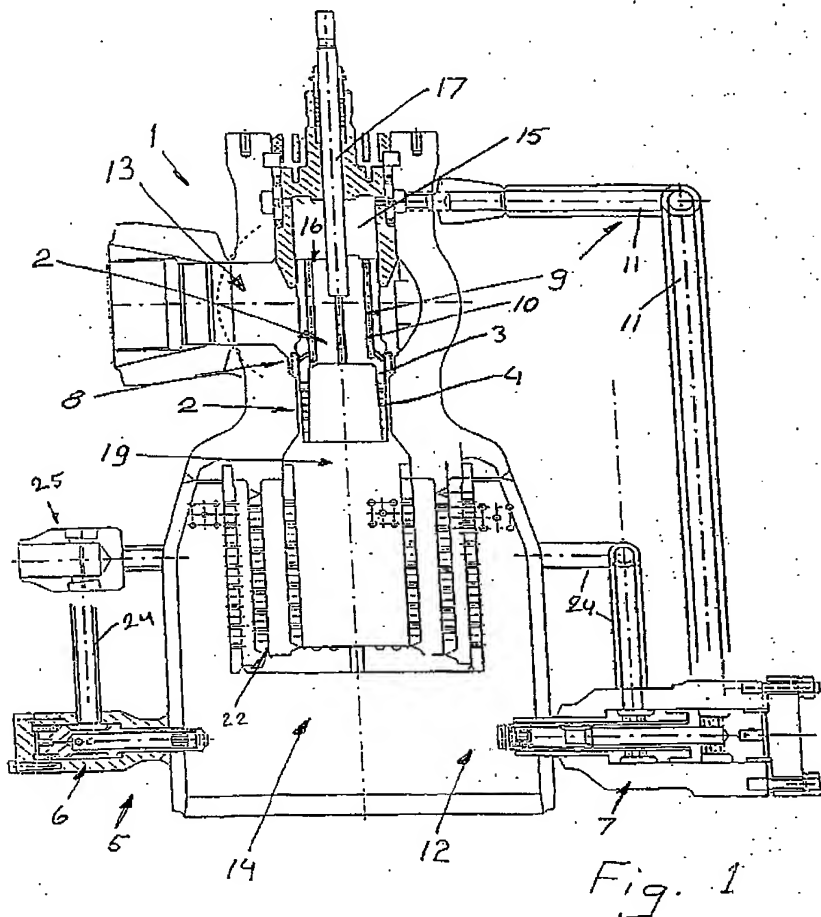

SUBSTITUTE SHEET

NSDCCID: <WD\_0703319A1\_1>

2/6

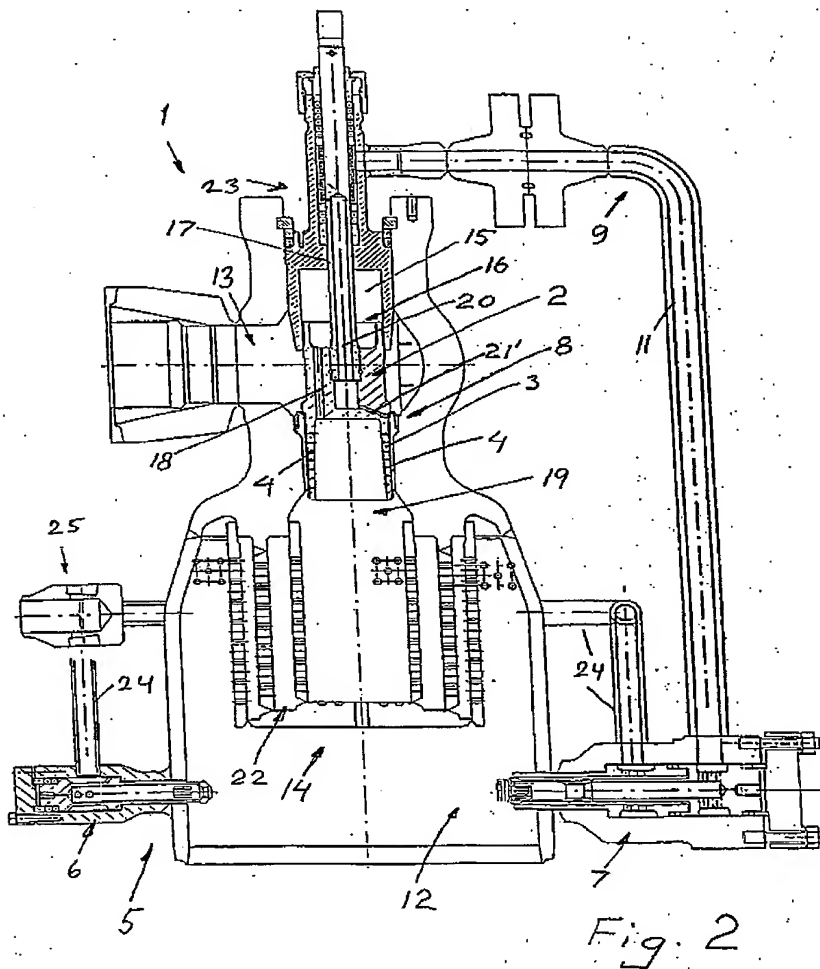


**SUBSTITUTE SHEET**

WO 97/03313

96/00922

3/6

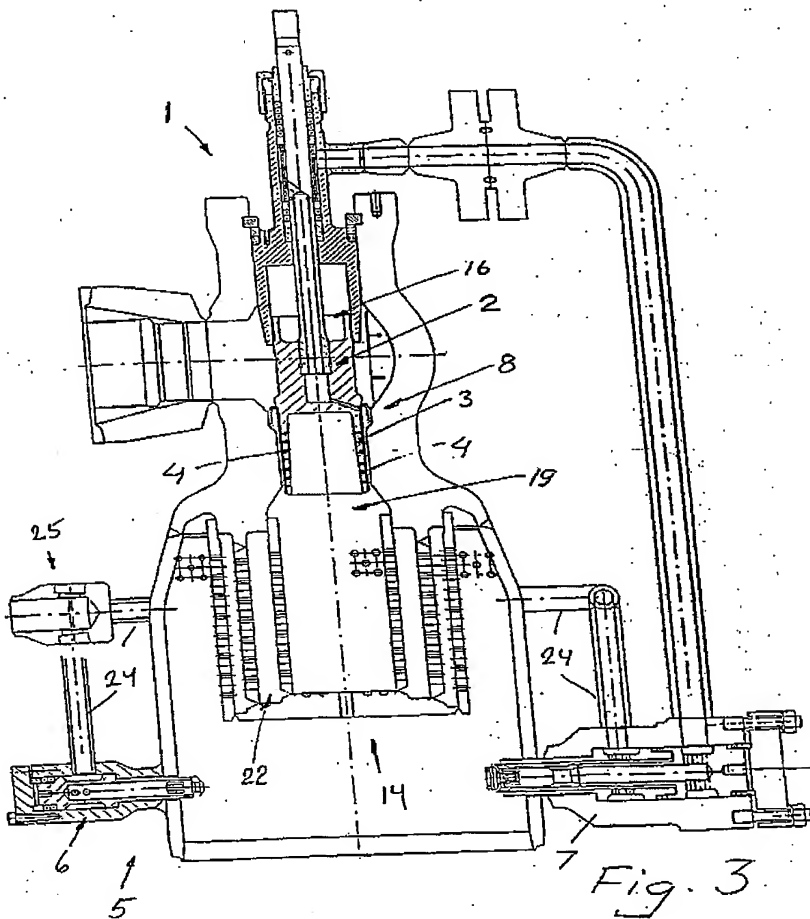

SUBSTITUTE SHEET

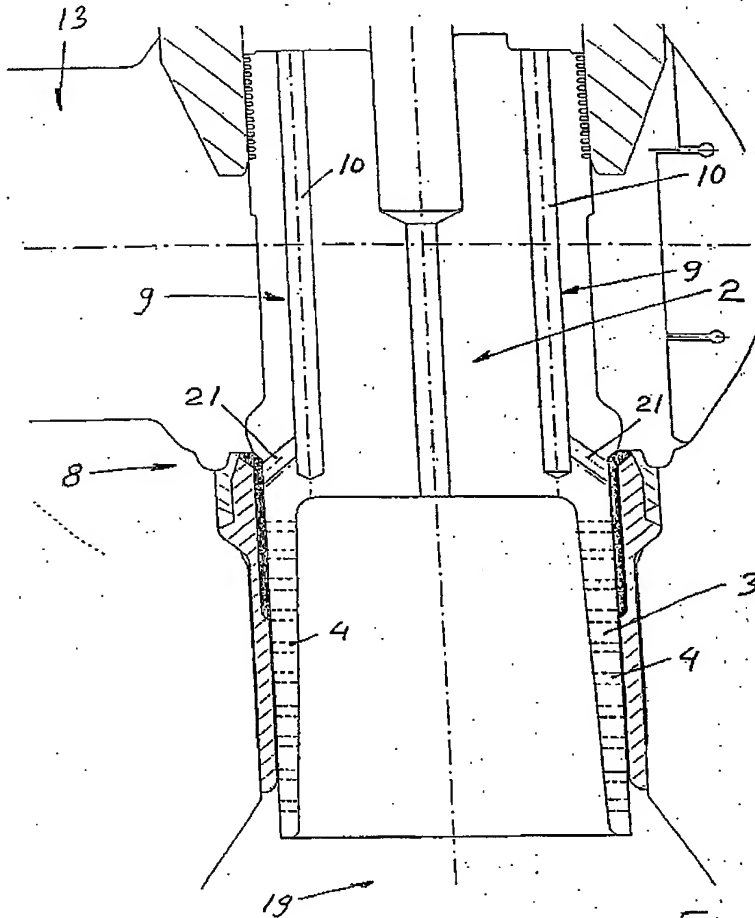


Fig. 4

**SUBSTITUTE SHEET**



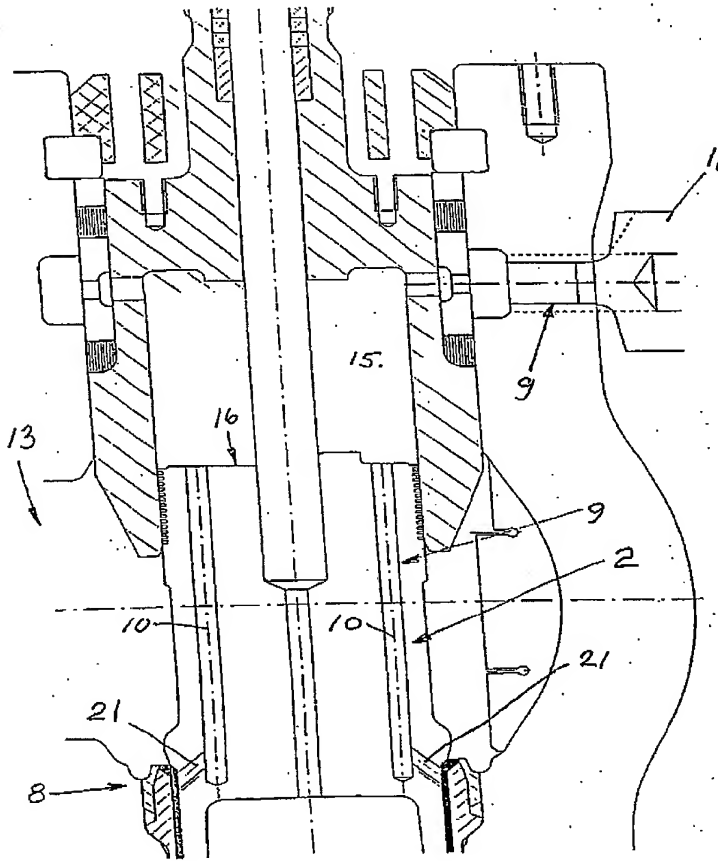


Fig. 5


**SUBSTITUTE SHEET**

WO 97/03313

PCT/SE96/00922

6/6

Fig. 6

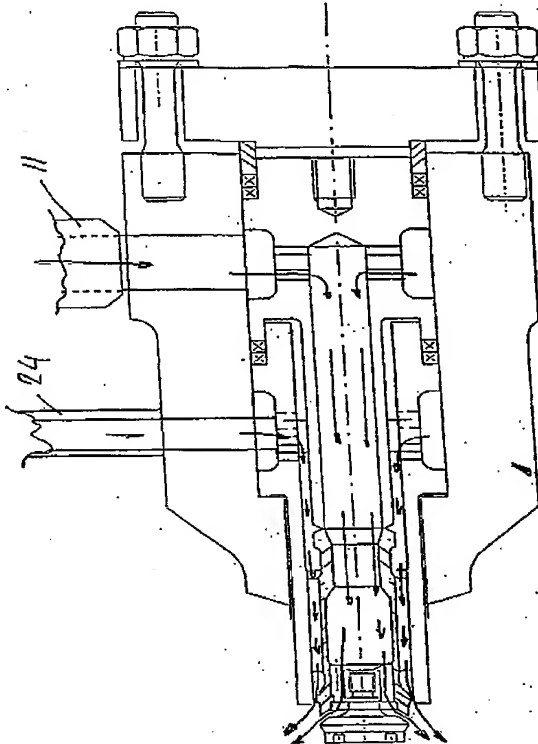

**SUBSTITUTE SHEET**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 96/00922

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: F16K 47/04, F22G 5/12 // F16K 3/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: F16K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9102915 A1 (KEYSTONE INTERNATIONAL HOLDINGS CORP.), 7 March 1991 (07.03.91), figures 1-3, claims 1-4	1,8
A	WO 9404255 A1 (BTG KÄLLE INVENTING AB), 3 March 1994 (03.03.94), figures 1,1A,2, claims 12, 17	1,8

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

11 October 1996

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Form PCT/ISA/210 (second sheet) (July 1992)

Date of mailing of the international search report

23 -10- 1996

Authorized officer

Christian Westberg  
Telephone No. +46 8 782 25 00

JSDOCID: &lt;WO\_07035184\_1&gt;

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

01/10/96

International application No.

PCT/SE 96/00922

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 9102915	07/03/91	AU-B- 643949	02/12/93
		AU-A- 5817490	03/04/91
		CA-A- 2017895	24/02/91
		CN-B- 1024368	27/04/94
		CN-A- 1050082	20/03/91
		EP-A- 0489018	10/06/92
		JP-T- 4505497	24/09/92
		NO-B, C- 178353	27/11/95
		US-A- 5012841	07/05/91
WO-A1- 9404255	03/03/94	AT-T- 140876	15/08/96
		DE-D- 69303905	00/00/00
		EP-A, B- 0658128	21/06/95
		JP-T- 8500428	16/01/96
		SE-C- 501510	06/03/95
		SE-A- 9202454	27/02/94
		US-A- 5380470	10/01/95

Form PCT/ISA/210 (patent family annex) (July 1992)

NSDOCID: &lt;WO\_9703313A1\_L&gt;